

---

## Des-Case Modification Plan


### Chemineer Model HT Agitator

V2

---



## Reliability Services

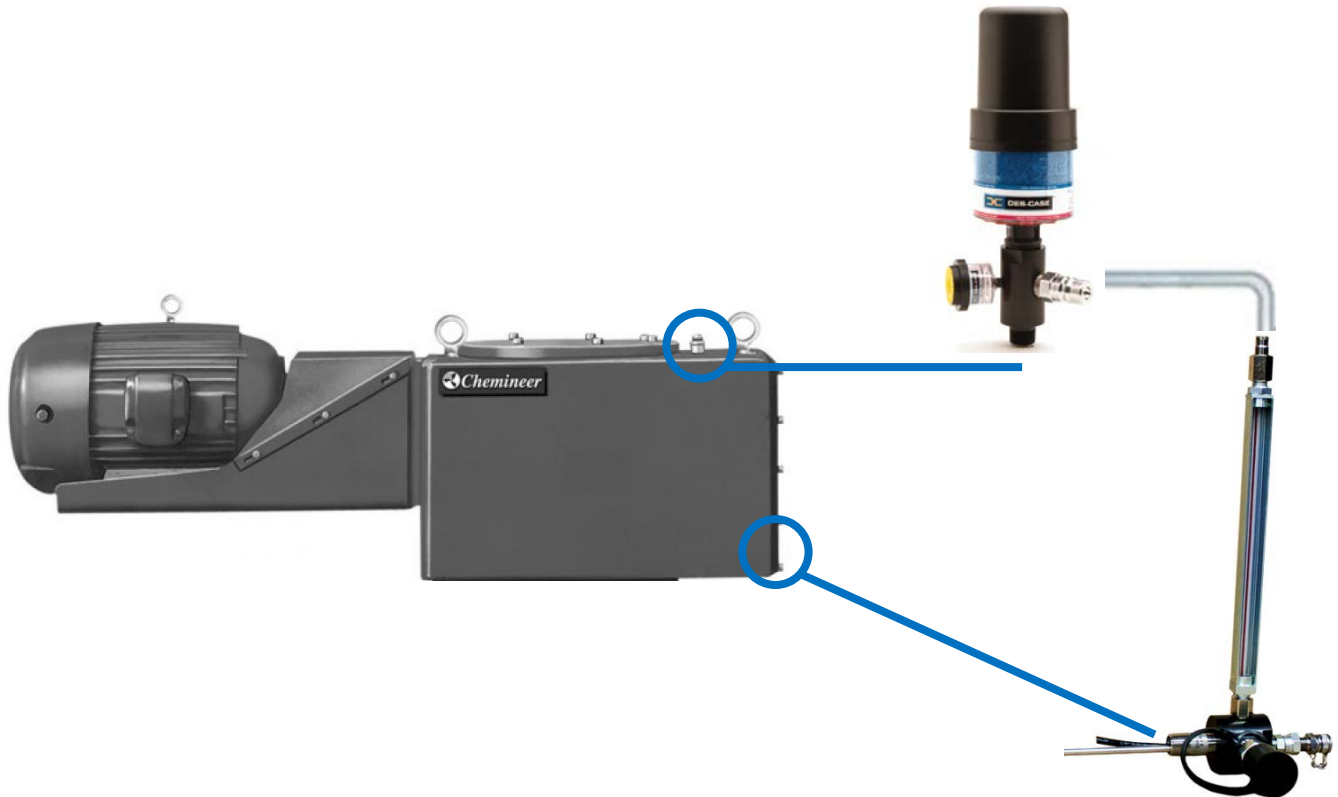

1. Replace the fill plug with a Des-Case Gearbox Adapter or equivalent. Ensure the fill plug is located above the top level of the oil.
2. Install a Des-Case Drain Port Adapter or equivalent on the drain port of the reservoir. Ensure that the sample port tube and the level gage tube do not interfere with movement inside the agitator.
3. Connect the vent port on the level gage to the Gearbox Adapter using clear 1/4" tubing.

| <b>Des-Case Corporation Products List<br/>Chemineer HT</b> |   |                        |
|--|---|------------------------|
| <b>Part No.</b>  | <b>Description</b>  | <b>Connection Size</b> |
| GAB102H82  | Gearbox Adapter with DC-HG-8 Desiccant Breather               | 3/4" NPT               |
| *DRA5B3S0920   | Drain Port Adapter with 3/4" NPT Connection and 9" Level Gage | 3/4" NPT               |

\*Part number will change based on the height of the Level Gage needed based on the reservoir size.

### **Disclaimer**

This report provides advice and recommendations intended to help improve overall lubrication practices. While every effort has been made to insure the information is accurate, Des-Case Corporation and its affiliates, distribution partners, agent and representatives offer no warranty as to the completeness or accuracy of the information provided. Neither Des-Case, its affiliates, distribution partners, agents or representatives shall be liable for any losses, damages, costs or expenses (including loss of profits, business interruption or any other direct or indirect costs) arising from the use of the information and recommendations provided as part of this report. This report must not be copied, reproduced, distributed or disseminated to anybody not employed by the company for whom the report was created without the express written consent of Des-Case Corporation.