

FLUID HANDLING

Drain Port Adapter Kit

Specifically designed for equipment with limited port locations and serves as a single solution for draining industrial oil.



Overview

The Drain Port Adapter Kit: The Key Benefits


- Allows for easy equipment adaptation and quick connection to a filtration system
- Provides multiple useful components when port locations are limited
- Allows for customization

What Are All the Features?*

- Oil level indicator and vent tube
- Optional free-standing water sight glass
- Quick connect plugs
- Various connection sizes
- Sample valve

*Don't see the options you need? Contact our Technical Support team at (615) 672-8800 or sales@descase.com.

Which Part Is Which?

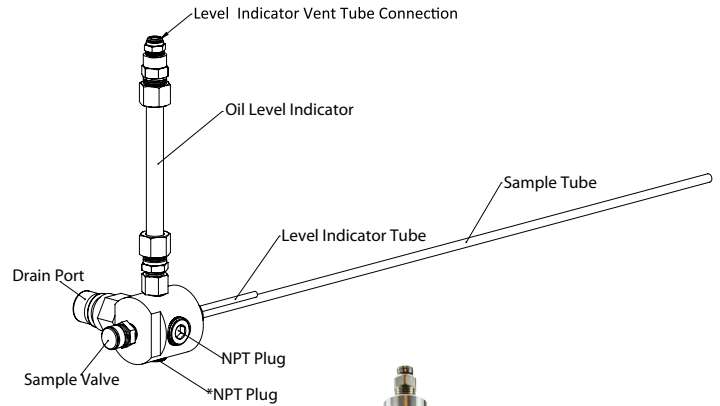

*Optional Sight Glass Not Shown



Try the Entire Selection of Des-Case Adapter Kits



To Order:

Drain Port Adapter Kit

DRA			3				
Box 1	Box 2	Box 3	Box 4	Box 5	Box 6	Box 7	

NOTE: Recommended maximum flow rate of 5gpm

Tank Connection Size [Box 1]

Code	Description
5	3/4 inch
7	1 inch

Drain & Fill Connector Type [Box 2]

Code	Description
B	ISO B Connector
A	ISO A Connector
F	Flush Face Connector
R	ISO B Connector-BSPP
Q	ISO A Connector-BSPP
P	Flush Face Connector-BSPP

NOTE: All connectors are plug ends (male)

Drain Connector Size [Box 3]

Code	Description
3	1 inch

NOTE: Standard drain connector size is 1"

Oil Level Indicator Type [Box 4]

Code	Description
C	Acrylic

Oil Level Indicator Height [Box 5]

Code	Description
03	3 inches
06	6 inches
09	9 inches
12	12 inches
15	15 inches

Sample Valve [Box 6]

Code	Description
0	None
1	Standard Minimes
2	High Viscosity

NOTE: Sample tubing included and comes standard in 24"

Free Water Indicator [Box 7]

Code	Description
0	None
1	1 Ounce
3	3 Ounces